


射频二极管开关


SWITCHPLEXER®

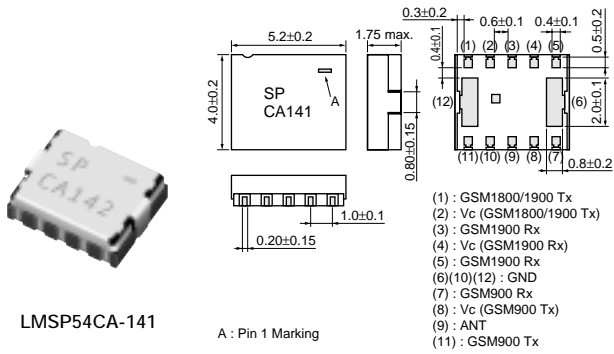

LMSP54CA-141

A : Pin 1 Marking

All the technical data and information contained herein are subject to change without prior notice. (in mm)

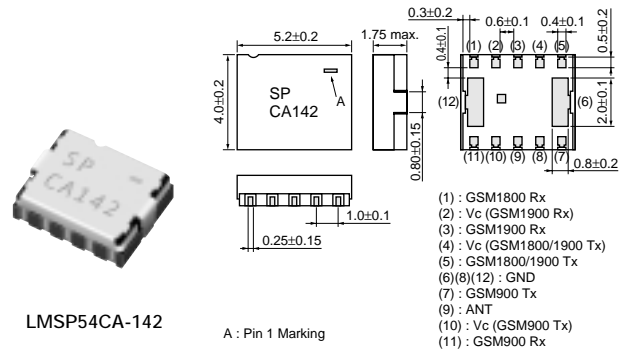

LMSP54CA-142

A : Pin 1 Marking

All the technical data and information contained herein are subject to change without prior notice. (in mm)

品名	频率范围 (Band1-1 Tx) (MHz)	频率范围 (Band1-1 Rx) (MHz)	频率范围 (Band2-1 Tx) (MHz)	频率范围 (Band2-1 Rx) (MHz)	频率范围 (Band2-2 Tx) (MHz)	频率范围 (Band2-2 Rx) (MHz)	插入损耗 I (Band1 Tx-ANT) (dB)	插入损耗 I (ANT-Band1 Rx) (dB)	插入损耗 I (Band2 Tx-ANT) (dB)	插入损耗 I (ANT-Band2-1 Rx) (dB)	插入损耗 I (ANT-Band2-2 Rx) (dB)
LMSP54CA-141	ftl:897.5 ±17.5MHz	942.5 ±17.5MHz	fdth:1747.5 ±37.5MHz	1842.5 ±37.5MHz	fpth:1880.0 ±30.0MHz	1960.0 ±30.0MHz	1.2 max. (at 25°C)	1.0 max. (at 25°C)	1.55 max. (at 25°C)	1.2 max. (at 25°C)	1.3 max. (at 25°C)
LMSP54CA-142	ftl:897.5 ±17.5MHz	942.5 ±17.5MHz	fdth:1747.5 ±37.5MHz	1842.5 ±37.5MHz	fpth:1880.0 ±30.0MHz	1960.0 ±30.0MHz	1.2 max. (at 25°C)	1.0 max. (at 25°C)	1.55 max. (at 25°C)	1.2 max. (at 25°C)	1.3 max. (at 25°C)

④注 · 本PDF产品目录是从株式会社村田制作所网站上下载的。规格若有变更，或若其中产品停产，恕不另行通知。请在订购之前向我公司销售代表或产品工程师查询。
· 本PDF产品目录所记载的产品规格，因受篇幅的限制，只提供了主要产品资料。在您订购前，必须确认规格表内容，或者互换协商定案图。