

Datasheet of SAW Device


SAW Single Filter

for Band41 / Unbalanced / 3pin / 1814

Murata PN: SAFRD2G59MA0F0A

■ Feature

- Band41FullBand
- Post PA

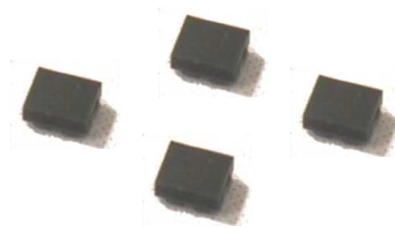

Note : This Murata SAW Component is Consumer grade product and applicable for Cellular phone or similar end devices.
Please also read Important Notice at the end of this document.

Revision
E

SAFRD2G59MA0F0A (Band41 / Unbalanced / 3pin / 1814)

- Operating temperature : -10 to +85 deg.C
- Storage temperature : -40 to +85 deg.C
- Input Power : +29 dBm 5000 h +55 deg.C
(*Input signal shall be applied to Terminal number(1).
- D.C. Volatage between the terminals : 0V
- Minimum Resistance between the terminals : 0ohm(Internally Terminal(1) and Terminal(2) to GND are approximately short circuit.)
- RoHS compliance : Yes
- ESD (ElectroStatic Discharge) sensitive device


The input power shall be applied to Tx-port within own Tx passband frequency range.

SAFRD2G59MA0F0A (Band41 / Unbalanced / 3pin / 1814)

Package Dimensions & Recommended Land Pattern

unit: mm

Dimensions

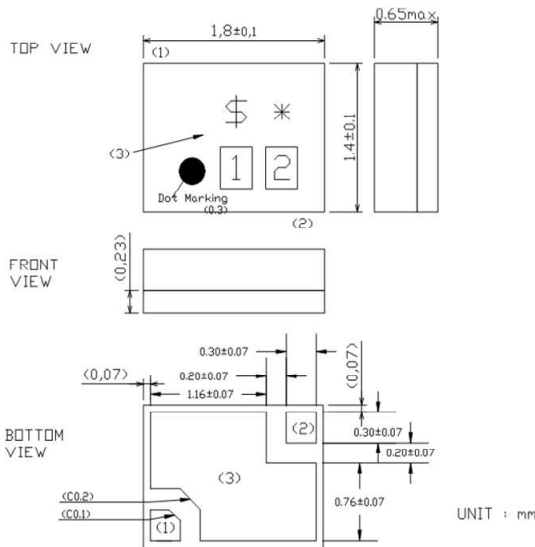

Marking : Laser Printing


- * : Month code
- \$: Date code
- 1 : 5
- 2 : 5

Terminal Number


- (1) : Unbalance Port (PA-side)
- (2) : Unbalance Port (Ant.-side)
- (3) : GND.

Notice) Please refer to Measurement Circuit for Port information in detail.

Land Pattern

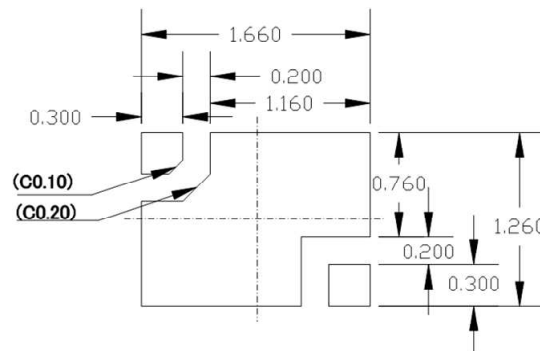

Measurement Circuit (Top Thru View)

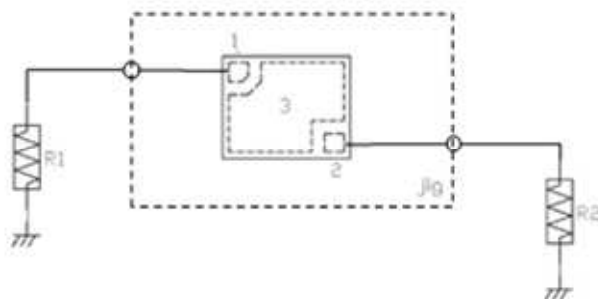

R1 : 50 ohm	
R2 : 50 ohm	

SAFRD2G59MA0F0A (Band41 / Unbalanced / 3pin / 1814)

Electrical Characteristic < Single Filter >



Item	Characteristics (-10 to +85 deg.C)						Unit	Note		
	min.	typ.*	max.							
Center Frequency						2593	MHz			
Insertion Loss	2496.	to	2501.	MHz		2.7	3.8	dB _{INT}	Any 4.5MHz Average for CHN, JP, US Area for JP Area for Band7 DRx	
	2501.	to	2690.	MHz		2.7	3.3	dB _{INT}		
	2555.	to	2655.	MHz		1.9	2.7	dB		
	2545.	to	2575.	MHz		1.7	2.2	dB		
	2620.	to	2690.	MHz		2.3	3.2	dB		
Ripple Deviation	2496.	to	2520.	MHz		1.4	2.6	dB		
	2520.	to	2690.	MHz		0.7	1.8	dB		
VSWR	2496.	to	2520.	MHz		1.3	2.0			
	2520.	to	2690.	MHz		1.5	2.0			
Absolute Attenuation	10.	to	916.	MHz	43	47		dB		
	925.	to	960.	MHz	37	46		dB		
	1226.57	to	1228.63	MHz	25	39		dB		
	1242.42	to	1249.14	MHz	25	39		dB		
	1248.	to	1564.	MHz	30	33		dB		
	1559.	to	1563.	MHz	30	33		dB		
	1565.42	to	1573.37	MHz	30	33		dB		
	1573.37	to	1577.47	MHz	30	33		dB		
	1577.47	to	1585.42	MHz	30	33		dB		
	1597.55	to	1605.89	MHz	30	33		dB		
	1615.	to	2400.	MHz	15	18		dB		
	1710.	to	1785.	MHz	20	27		dB		
	1805.	to	1850.	MHz	18	24		dB		
	1880.	to	1920.	MHz	18	21		dB		
	1920.	to	1980.	MHz	16	20		dB		
	2110.	to	2170.	MHz	16	19		dB		
	2401.	to	2468.	MHz	37	44		dB _{INT}	WLAN Ch1-10 18MHz-BW	
	2451.	to	2473.	MHz	35	46		dB _{INT}	WLAN Ch11 18MHz-BW	
	2456.	to	2478.	MHz	18	46		dB _{INT}	WLAN Ch12 18MHz-BW	
	2461.	to	2483.	MHz	10	20		dB _{INT}	WLAN Ch13 18MHz-BW	
	2775.	to	4992.	MHz	20	22		dB		
	4992.	to	5380.	MHz	25	30		dB		
	5381.	to	7487.	MHz	17	22		dB		
	7488.	to	8070.	MHz	13	16		dB		

* Typical value at 25±2deg.C

SAFRD2G59MA0F0A (Band41 / Unbalanced / 3pin / 1814)

Electrical Characteristic


< Single Filter >

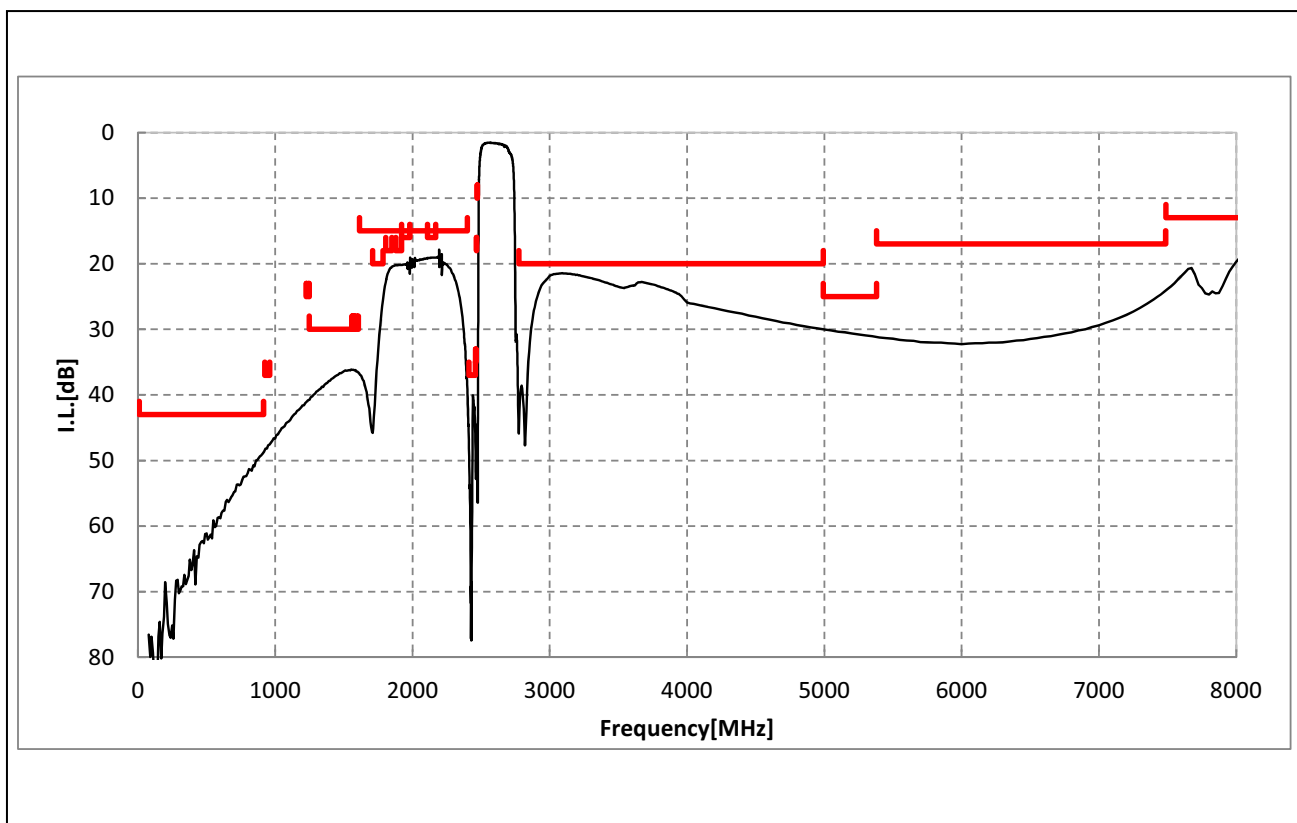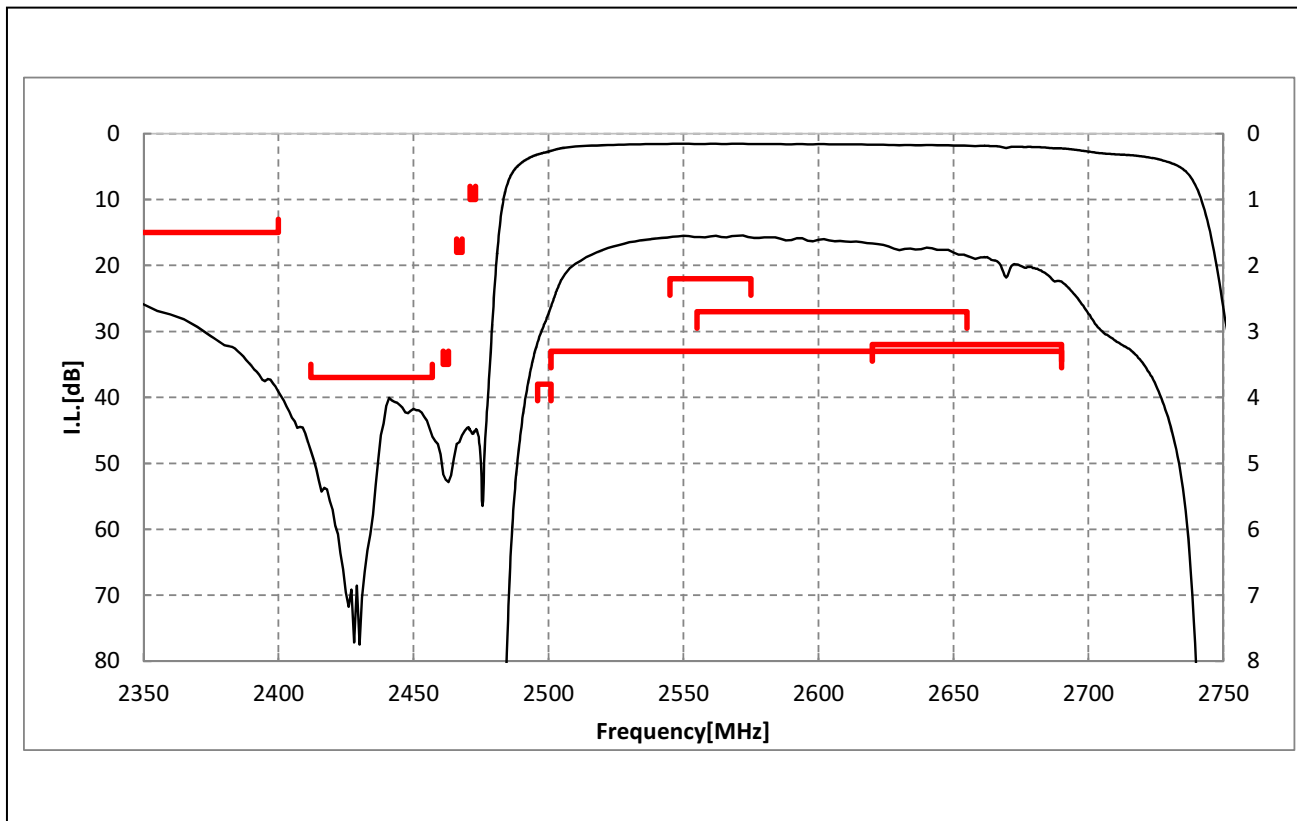


SAFRD2G59MA0F0A (Band41 / Unbalanced / 3pin / 1814)

Dimensions of Tape & Reel unit: mm


Carrier Tape

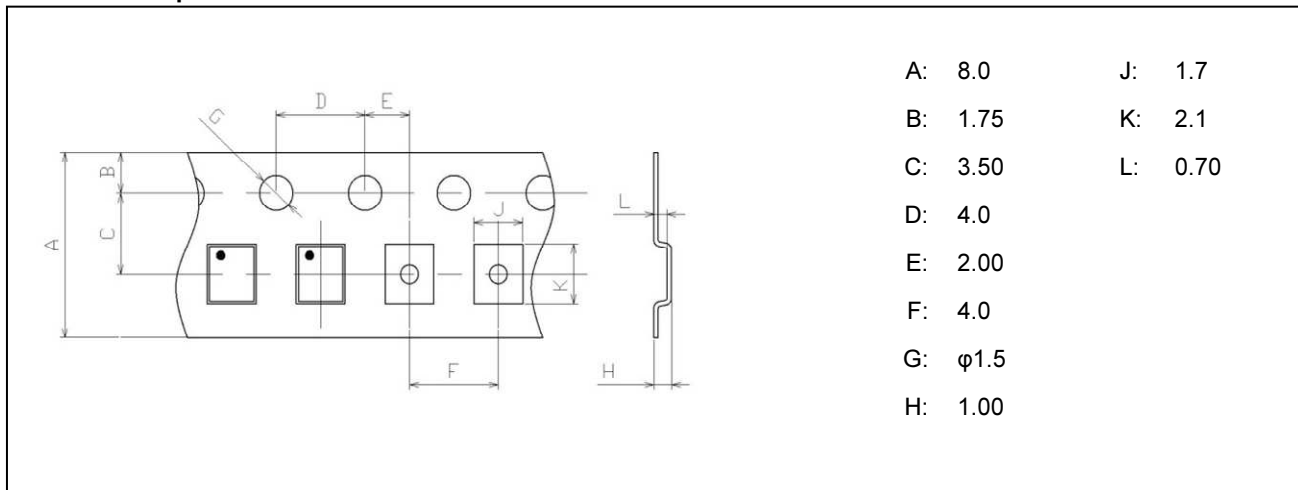

Tape

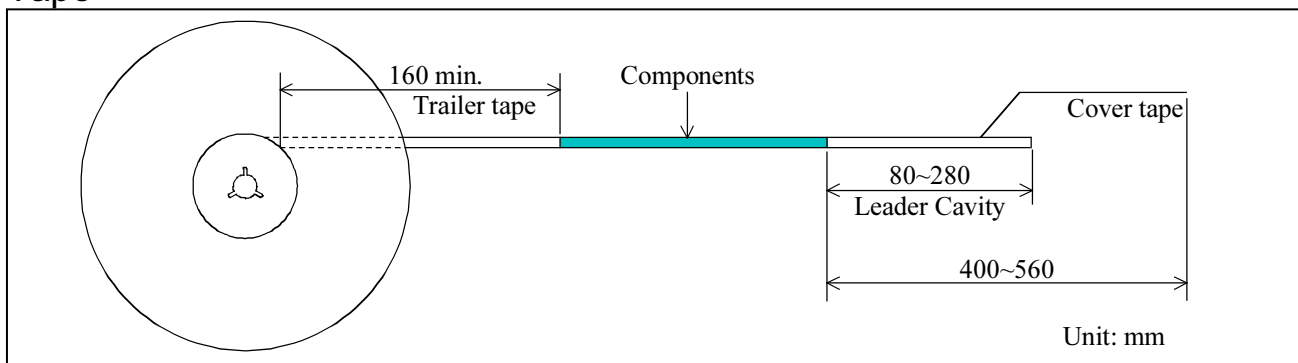

Reel

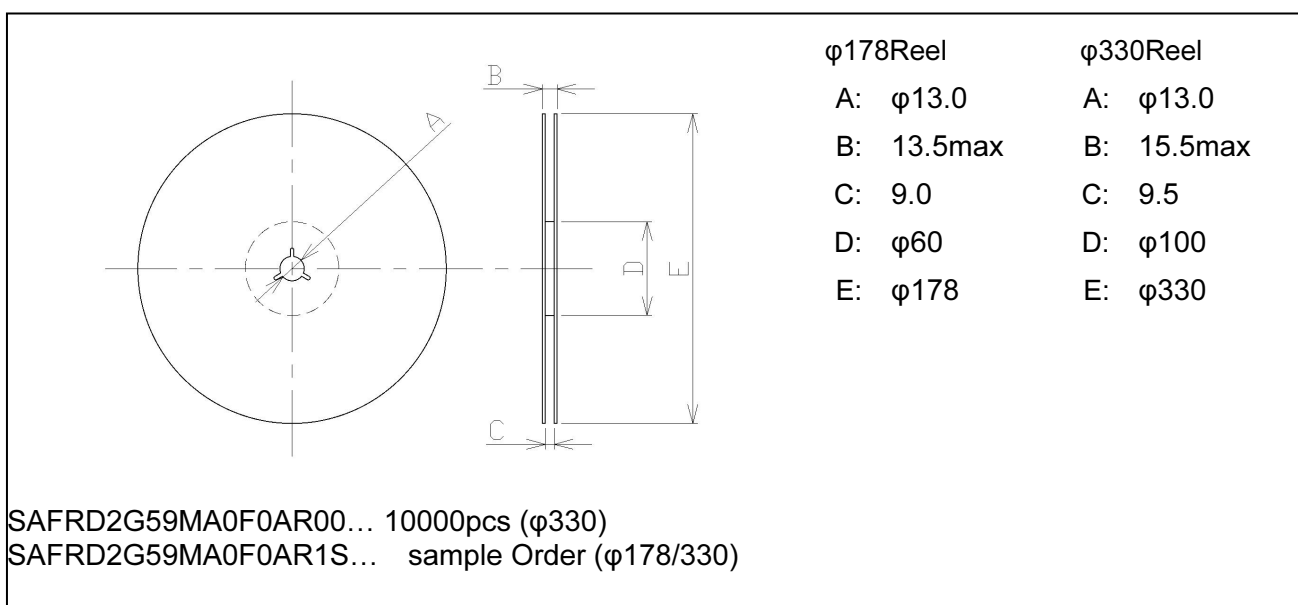

Important Notice (1/2)

PLEASE READ THIS NOTICE BEFORE USING OUR PRODUCTS.

Please make sure that your product has been evaluated and confirmed from the aspect of the fitness for the specifications of our product specified in the front page of this product specifications (the "Product" or "Products") when our Product is mounted to your product. All the items and parameters in this product specification/datasheet/catalog have been prescribed on the premise that our Product is used for the purpose, under the condition and in the environment specified in this specification. You are requested not to use our Product deviating from the condition and the environment specified in this specification.

Please note that the only warranty that we provide regarding the Product is its conformance to the specifications provided herein. Accordingly, we shall not be responsible for any defects in products or equipment incorporating such Products, which are caused under the conditions other than those specified in this specification.

WE HEREBY DISCLAIMS ALL OTHER WARRANTIES REGARDING THE PRODUCTS, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION ANY WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE, THAT THEY ARE DEFECT-FREE, OR AGAINST INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHTS.

The Product shall not be used for any application which requires especially high reliability or accuracy in order to prevent defect which incurs high possibility of damage to the third party's life, body or property such as the applications listed below as item (a) to (j) (the "Prohibited Application"). You acknowledge and agree that, if you use our Products in the Prohibited Applications, we will not be responsible for any damage caused by such use.

Furthermore, YOU AGREE TO INDEMNIFY AND DEFEND US AND OUR AFFILIATES AGAINST ALL CLAIMS, DAMAGES, COSTS, AND EXPENSES THAT MAY BE INCURRED, INCLUDING WITHOUT LIMITATION, ATTORNEY FEES AND COSTS, DUE TO THE USE OF OUR PRODUCTS IN THE PROHIBITED APPLICATIONS.

- (a) Aircraft equipment.
- (b) Aerospace equipment
- (c) Undersea equipment.
- (d) Power plant control equipment
- (e) Medical equipment.
- (f) Transportation equipment (vehicles, automotive, trains, ships, etc.).
- (g) Traffic signal equipment.
- (h) Disaster prevention / crime prevention equipment.
- (i) Burning / explosion control equipment
- (j) Application of similar complexity and/ or reliability requirements to the applications listed in the above.

For the avoidance of doubt, the Product is not automotive grade, and will not support such requests for automotive as below, also not support other specific requests for automotive.

- AEC-Q200
- PPAP
- IATF16949, VDA6.3
- Zero Defect program
- Long product life cycle
- Automotive 8D failure analysis and report

Important Notice (2/2)

We expressly prohibit you from analyzing, breaking, Reverse-Engineering, remodeling altering, and reproducing our product. Our product cannot be used for the product which is prohibited from being manufactured, used, and sold by the regulations and laws in the world.

Please do not use the Product in molding condition.

This product is ESD (ElectroStatic Discharge) sensitive device.
When you install or measure this, you should be careful not to add antistatic electricity or high voltage.
Please be advised that you had better check anti surge voltage.

We do not warrant or represent that any license, either express or implied, is granted under any our patent right, copyright, mask work right, or our other intellectual property right relating to any combination, machine, or process in which our Products or services are used. Information provided by us regarding third-party products or services does not constitute a license from us to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from us under our patents or other intellectual property.

Please do not use our Products, our technical information and other data provided by us for the purpose of developing of mass-destruction weapons and the purpose of military use.
Moreover, you must comply with "foreign exchange and foreign trade law", the "U.S. export administration regulations", etc.

Please note that we may discontinue the manufacture of our products, due to reasons such as end of supply of materials and/or components from our suppliers.

Customer acknowledges that Murata will, if requested by you, conduct a failure analysis for defect or alleged defect of Products only at the level required for consumer grade Products, and thus such analysis may not always be available or be in accordance with your request (for example, in cases where the defect was caused by components in Products supplied to Murata from a third party).

The Product shall not be used in any other application/model than that of claimed to Murata.

Customer acknowledges that engineering samples may deviate from specifications and may contain defects due to their development status.

We reject any liability or product warranty for engineering samples.

In particular we disclaim liability for damages caused by

- the use of the engineering sample other than for evaluation purposes, particularly the installation or integration in the Product to be sold by you,
- deviation or lapse in function of engineering sample,
- improper use of engineering samples.

We disclaim any liability for consequential and incidental damages.

If you can't agree the above contents, you should inquire our sales.