

### NOVATOR IN ELECTRONICS

information provided may not be the most current.

Please download the latest datasheet of 7BB-27-4L0 from the official website of Murata Manufacturing

Note: If you have not downloaded this document from our official website, please note that the

http://www.murata.com/en/products/productdetail?partno=7BB-27-4L

# 7BB-27-4L0










### **Applications**

Unsuitable	Please be sure to read and comply with	
Applications	these "Precautions for use."	
	Consumer equipment,Industrial	
	Equipment	
	Please refer to Our Website and	
	specifications, etc. for information about	
Specific	the performance, functions, quality,	
Applications	management, and safety required for	
	the above applications, and use	
	Products after confirming the	
	performance and reliability of the actual	
	Product.	



### Appearance & Shape

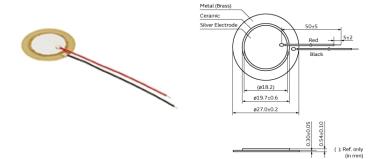



### Packaging Information

Packaging	Specifications	Standard Packing Quantity
-	Bulk	600



### **Features**

- 1. Clear sound
- 2. Ultra thin and lightweight
- 3. No contacts: therefore, no noise and highly reliable
- 4. Low power consumption for voltage type

1 of 2

### Attentior

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.





## 7BB-27-4L0

Note: If you have not downloaded this document from our official website, please note that the information provided may not be the most current.

Please download the latest datasheet of 7BB-27-4L0 from the official website of Murata Manufacturing

http://www.murata.com/en/products/productdetail?partno=7BB-27-41



## **Specifications**

Resonance Frequency	4.6kHz
Resonant Frequency Torelance	±0.5kHz
Resonant Impedance (R1)	300Ω
Capacitance	20nF
Capacitance Tolerance	±30%
Measurement Condition of Capacitance	[1kHz]
Operating Temperature Range	-20°C to 70°C
Storage Temperature Range	-30°C to 80°C
Shape	With lead wire
Plate Size	27mm
Element Size	19.7mm
Plate Material	Brass
Specification of Lead Wire	AWG32
Lead Length	50mm
Drive Type	External Drive
EIAJ Part Number	PD-SU2-C27-46
Mass	2055mg

2 of 2

### Attention

1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

