

Note: This datasheet may be out of date. Please download the latest datasheet of CSTNE20M0VH3L000R0 from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en-gb/products/productdetail?partno=CSTNE20M0VH3L000R0

CSTNE20M0VH3L000R0












Applications

Unsuitable	Please be sure to read and comply with	
Applications	these "Precautions for use."	
Specific Applications	Consumer equipment,Industrial equipment except for transportation & facility & energy equipment,Medical equipment [GHTF A/B],Mobile Electronics Please refer to Our Website and specifications, etc. for information about the performance, functions, quality, management, and safety required for the above applications, and use Products after confirming the performance and reliability of the actual Product.	



Appearance & Shape

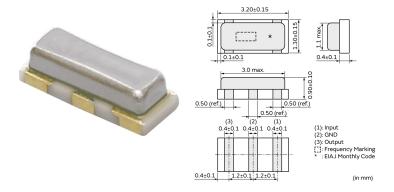



Packaging Information

Packaging	Specifications	Standard Packing Quantity
R0	180mm Embossed Tape	3000



Features

MURATA's frequency adjustment and packaging technology expertise has enabled the development of the chip CERALOCK.

Features

- 1. Oscillation circuits do not require external load capacitors.
- 2. Available for a wide frequency range.
- 3. Extremely small and have a low profile.
- 4. No adjustment is necessary for oscillation circuits.
- 5. Stable supply is ensured due to not using precious metal(Palladium).

1 of 2

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering





Product Search Data Sheet

Note: This datasheet may be out of date. $Please\ download\ the\ latest\ data sheet\ of\ CSTNE20M0VH3L000R0\ from\ the\ official\ website\ of\ Muratangle and the statest of\ Muratangle and the statest of\ Muratangle and\ Muratangl$ Manufacturing Co., Ltd.

http://www.murata.com/en-gb/products/productdetail?partno=CSTNE20M0VH3L000R0

CSTNE20M0VH3L000R0



Specifications

	O	
Product Type	Ceramic Resonator	
Troduct Type	(CERALOCK)	
Series	CSTNE_VH3L	
_		
Frequency	20.000MHz	
Frequency Tolerance	+/-0.07% max.	
Operating Temperature	-40°C~85°C	
Range	-40 C-65 C	
Frequency Shift by	+/-0.11% max.	
Temperature	17-0.1170 IIIax.	
Frequency Aging	+/-0.07% max.	
Resonant Impedance (R1)	40ohm max.	
Built-in Load Capacitance	15pF	
(CL1/CL2)	13bL	
Shape	SMD	
Wash	Not available	
L x W (size)	3.2x1.3mm	
Mass	16.972mg	

2 of 2

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

