

Product Search Data Sheet

Note: If you have not downloaded this document from our official website, please note that the information provided may not be the most current. Please download the latest datasheet of CSTCE19M6V53-R0 from the official website of Murata

CSTCE19M6V53-R0










Applications

Unsuitable	Please be sure to read and comply with
Applications	these "Precautions for use."
	Consumer equipment
	Please refer to Our Website and
	specifications, etc. for information about
Specific	the performance, functions, quality,
Specific Applications	management, and safety required for
	the above applications, and use
	Products after confirming the
	performance and reliability of the actual
	Product.



Appearance & Shape

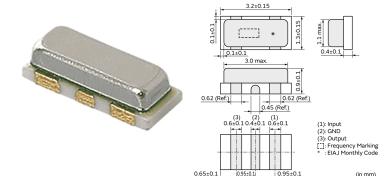



Packaging Information

Packaging	Specifications	Standard Packing Quantity
R0	180mm Embossed Tape	3000



Features

MURATA's package technology expertise has enabled the development of the Chip CERALOCK.

High-density mounting is made possible by the small package and the elimination of the need for an external load capacitor.

Features

- 1. Oscillation circuits do not require external load capacitors.
- 2. Available for a wide frequency range.
- 3. Extremely small and have a low profile.
- 4. No adjustment is necessary for oscillation circuits.

1 of 2

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering





Note: If you have not downloaded this document from our official website, please note that the information provided may not be the most current.

Please download the latest datasheet of CSTCE19M6V53-R0 from the official website of Murata

http://www.murata.com/en-sq/products/productdetail?partno=CSTCE19M6V53-

CSTCE19M6V53-R0



Specifications

	Ceramic Resonator	
Product Type		
	(CERALOCK)	
Series	CSTCE_V	
Frequency	19.660MHz	
Fraguency Tolorance	+/-0.50% max.	
Frequency Tolerance	+/-0.30% max.	
Operating Temperature	-20°C~80°C	
Range	1-20 6-00 6	
Frequency Shift by	. / 0 200/	
Temperature	+/-0.30% max.	
Frequency Aging	+/-0.20% max.	
Trequency rights	-7 0.2070 max.	
Resonant Impedance (R1)	40ohm max.	
Built-in Load Capacitance		
•	15pF	
(CL1/CL2)		
Shape	SMD	
Wash	Not available	
vvasii	INOL AVAIIADIE	
L x W (size)	3.2x1.3mm	
, ,		
Mass	17mg	

2 of 2

Attention

1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

