

Product Search Data Sheet

XRCHJ36M000F1QA0P0


Discontinued

RoHS REACH

## Applications

Unsuitable	Please be sure to read and comply with
Applications	these "Precautions for use."
Specific Applications	Consumer equipment
	Please refer to Our Website and
	specifications, etc. for information about
	the performance, functions, quality,
	management, and safety required for
	the above applications, and use
	Products after confirming the
	performance and reliability of the actual
	Product.

## Appearance & Shape

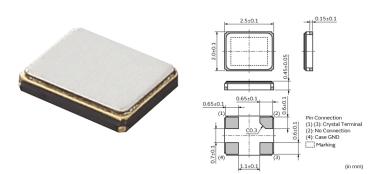

Note: If you have not downloaded this document from our official website, please note that the information provided may not be the most current.

Please download the latest datasheet of XRCHJ36M000F1QA0P0 from the official website of Murata

http://www.murata.com/en-sg/products/productdetail?partno=XRCHJ36M000F1QA0P0

## Packaging Information

Packaging	Specifications	Standard Packing Quantity
P0	180mm Plastic Tape	3000



Standard package size (2520) product with seam sealing technology.

Robust package gives high reliability and high impact resistance. They are suitable for various types of digital communication equipment requiring high reliability.

1 of 2

#### Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.





# XRCHJ36M000F1QA0P0

Note: If you have not downloaded this document from our official website, please note that the information provided may not be the most current.

Please download the latest datasheet of XRCHJ36M000F1QA0P0 from the official website of Murata

http://www.murata.com/en-sg/products/productdetail?partno=XRCHJ36M000F1QA0P0

### Specifications

Product Type	Crystal Unit
Series	XRCHJ
Туре	TDS-2520F
Frequency	36.0000MHz
Frequency Tolerance	+/-10ppm max. (25+/-3°C)
Operating Temperature Range	-30°C~85°C
Frequency Shift by Temperature	+/-15ppm max.
Frequency Aging	+/-3ppm max./year
Equivalent Series Resistance (ESR)	80ohm max.
Drive Level (DL)	30µW
Load Capacitance (Cs)	8pF
Shape	SMD
Wash	Not available
L x W (size)	2.5x2.0mm
Mass	7.87mg

2 of 2

#### Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

