

Note: If you have not downloaded this document from our official website, please note that the information provided may not be the most current.

Please download the latest datasheet of LQH2HPN4R7MJR# from the official website of Murata

http://www.murata.com/en-us/products/productdetail?partno=LQH2HPN4R7MJR%23

"#"at the end indicates the package specification code.

Size Code 2520 (1008) in mm (in inch), 1.2mm max. Thickness. Low DC resistance design















# < List of part numbers with package codes > LQH2HPN4R7MJRL




### **Applications**

Unsuitable	Please be sure to read and comply with
Applications	these "Precautions for use."
	Consumer equipment,Medical
	equipment [GHTF A/B/C] except for
	implant & surgery & auto injector,
	Industrial equipment except for
	transportation & facility & energy
	equipment
Specific	Please refer to Our Website and
Applications	specifications, etc. for information about
	the performance, functions, quality,
	management, and safety required for
	the above applications, and use
	Products after confirming the
	performance and reliability of the actual
	Product.
Recommended	Canalimar aguinment
Applications	Consumer equipment



### Appearance & Shape







### **Notices**

When rated current is applied to the products, inductance will be within ±30% of initial inductance value range. Keep the temperature (ambient temperature plus self-generation of heat) under 125°C. When rated current is applied to the products, the self-temperature rise shall be limited to 40°C max. (ambient temperature 85°C). When rated current is applied to the products, the self-temperature rise shall be limited to 20°C max. (ambient temperature 85 °C to 105°C).

1 of 4

#### Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering





Note: If you have not downloaded this document from our official website, please note that the information provided may not be the most current.

Please download the latest datasheet of LQH2HPN4R7MJR# from the official website of Murata

http://www.murata.com/en-us/products/productdetail?partno=LQH2HPN4R7MJR%2

"#"at the end indicates the package specification code.



### References

Packaging	Specifications	Standard Packing Quantity
L	180Embossed Tape	2000

Mass (typ.)		
1	1 piece	0.023g

2 of 4

#### Attention

1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.





Note: If you have not downloaded this document from our official website, please note that the information provided may not be the most current.

Please download the latest datasheet of LQH2HPN4R7MJR# from the official website of Murata

"#"at the end indicates the package specification code.



### **Specifications**

L size	2.5±0.2mm
W size	2.0±0.2mm
T size	1.1±0.1mm
Size code inch (mm)	1008 (2520)
Inductance	4.7μH±20%
Inductance Test Frequency	1MHz
Rated current (Isat) (Based on Inductance change)	1230mA
Rated current (Itemp) (Based on Temperature rise)	1290mA(Ambient temp.85°C) 770mA(Ambient temp.105°C)
Max. of DC resistance	0.204Ω
DC resistance	0.17Ω±20%
Operating Temperature Range (Self-temperature rise is included)	-40°C to 125°C
Operating Temperature Range(Self-temperature rise is not included)	-40°C to 105°C
Class of magnetic shield	Shielded (Magnetic Resin)
Self resonance frequency (min.)	40MHz
Brand	Murata
Series	LQH2HPN_JR

3 of 4

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.



Note: If you have not downloaded this document from our official website, please note that the information provided may not be the most current.


Please download the latest datasheet of LQH2HPN4R7MJR# from the official website of Murata


http://www.murata.com/en-us/products/productdetail?partno=LQH2HPN4R7MJR%2

"#"at the end indicates the package specification code.




### Characteristic Data

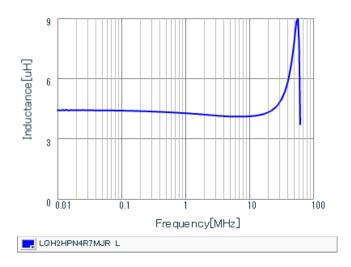

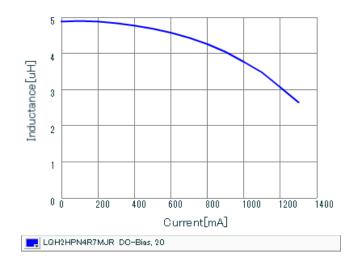

#### Inductance - Frequency Characteristics

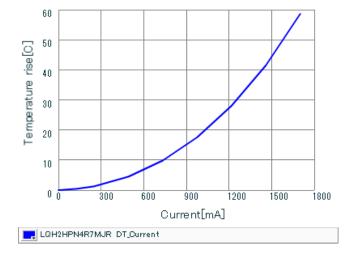

Impedance - Current Characteristics

Temperature Increase Characteristic

4 of 4

#### Attention

- 1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
- 2. This datasheet has only typical specifications because there is no space for detailed specifications.
- Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

