Product Search Data Sheet



# PVZ3G103C01R00


Note: If you have not downloaded this document from our official website, please note that the information provided may not be the most current.

Please download the latest datasheet of PVZ3G103C01R00 from the official website of Murata

http://www.murata.com/en-us/products/productdetail?partno=PVZ3G103C01R00



Appearance & Shape

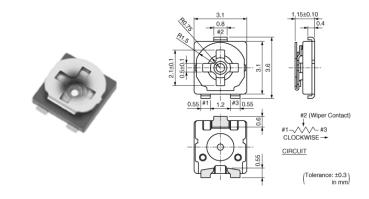



- 1. Excellent solderability characteristics are achieved via special plating techniques on each termination.
- 2. Specially designed substrate prevents wicking of flux onto the top of the part body.

### Packaging Information

Packaging	Specifications	Standard Packing Quantity
R00	180mm Embossed Tape	2500

1 of 3

### Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.





# PVZ3G103C01R00

Note: If you have not downloaded this document from our official website, please note that the information provided may not be the most current.

Please download the latest datasheet of PVZ3G103C01R00 from the official website of Murata

http://www.murata.com/en-us/products/productdetail?partno=PVZ3G103C01R00

### Specifications

Power Rating	0.1W	
Shape	SMD	
Maximum Working Voltage	50Vdc	
Adjustment Direction	Тор	
Size	3mm	
Auto Adjustment	Yes	
Number of Turns (Effective Rotation Angle)	1(230°±10°)	
Mechanical Rotation Angle	Endless	
Total Resistance Value	10kΩ	
Total Resistance Value Tolerance	±30%	
Temperature Coefficient of Resistance	±500ppm/°C	
Resistance Taper	B (Linear)	
Contact Resistance Variation	5% max. of nominal total resistance value	
Residual Resistance	2% max. of nominal total resistance value	
Torque	1.0 to 19.6mN ⋅ m	
Measure Condition of RatedPower	50°C	
Operating Temperature Range	-25℃ to 85℃	
Mass	0.02g	

2 of 3

#### Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.



Product Search Data Sheet




Note: If you have not downloaded this document from our official website, please note that the information provided may not be the most current.

 $\label{eq:Please} Please \ download \ the \ latest \ data sheet \ of \ PVZ3G103C01R00 \ from \ the \ official \ website \ of \ Murata$ 

http://www.murata.com/en-us/products/productdetail?partno=PVZ3G103C01R00

# PVZ3G103C01R00





Constructions

3 of 3

#### Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

