Product Search Data Sheet




## TZC3Z030A110B00

Discontinued RoHS REACH

Appearance & Shape





Note: If you have not downloaded this document from our official website, please note that the information provided may not be the most current.

Please download the latest datasheet of TZC3Z030A110B00 from the official website of Murata

http://www.murata.com/en-us/products/productdetail?partno=TZC3Z030A110B00



- 1. Small size with external dimension of 3.2(W)x4.5(L)x1.6(H)mm.
- 2. Color coded stator permits easy identification of capacitance and reduces mounting errors.
- 3. Can be adjusted with conventional adjustment tools having a thickness of 0.5mm.

4. Designed for automatic placement in surface mount applications.

5. Heat resistant resin withstands reflow soldering temperatures.

### Packaging Information

Packaging	Specifications	Standard Packing Quantity
B00	Bulk(Bag)	500

### Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering





# TZC3Z030A110B00

Note: If you have not downloaded this document from our official website, please note that the information provided may not be the most current.

Please download the latest datasheet of TZC3Z030A110B00 from the official website of Murata

http://www.murata.com/en-us/products/productdetail?partno=TZC3Z030A110B00

### Specifications

Shape	SMD	
Operating Temperature Range	-25°C to 85°C	
Thickness	1.6mm	
Thickness Tolerance	±0.1	
Rated Voltage	100Vdc	
Cmin.(max.)	1.4pF	
Cmax.	ЗрF	
Cmax. Tolerance	+50/-0%	
Adjustment Direction	Тор	
тс	NP0±300ppm/°C	
Q	300min. at 1MHz, Cmax.	
Withstanding Voltage	220Vdc	
Insulation Resistance(min.)	10000ΜΩ	
Torque	1.5 to 9.8mNm	
Stator/Case Color	Brown	
Mass	0.05g	

#### 2 of 3

#### Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.



Product Search Data Sheet




TZC3Z030A110B00

Note: If you have not downloaded this document from our official website, please note that the information provided may not be the most current.

Please download the latest datasheet of TZC3Z030A110B00 from the official website of Murata


http://www.murata.com/en-us/products/productdetail?partno=TZC3Z030A110B00



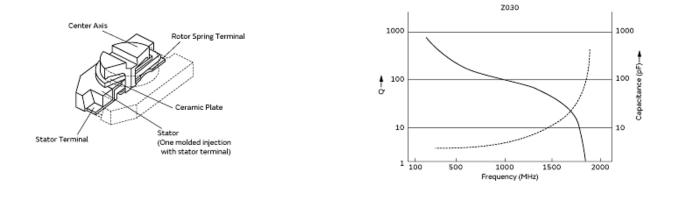

Constructions

**Frequency Characteristics** 

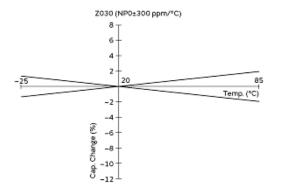

Temp. Coeff. Characteristics

3 of 3

### Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

