Product Search Data Sheet




# TZV2Z2R5A110B00

Discontinued RoHS REACH

Appearance & Shape





Note: If you have not downloaded this document from our official website, please note that the information provided may not be the most current.

Please download the latest datasheet of TZV2Z2R5A110B00 from the official website of Murata

http://www.murata.com/en-us/products/productdetail?partno=TZV2Z2R5A110B00



- 1. Small size with external dimensions of
- 2.3(W)x3.2(L)x1.45max.(H)mm.
- 2. Unique construction with no plastic material provides superior soldering heat resistance to maintain excellent characteristic performance after reflow soldering.
- 3. Designed for automatic placement in surface mount pplications.

4. Funnel shaped metal case enables in-process automatic adjustment.

### Packaging Information

Packaging	Specifications	Standard Packing Quantity
B00	Bulk(Bag)	500

1 of 3

#### Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.





# TZV2Z2R5A110B00

Note: If you have not downloaded this document from our official website, please note that the information provided may not be the most current.

Please download the latest datasheet of TZV2Z2R5A110B00 from the official website of Murata

http://www.murata.com/en-us/products/productdetail?partno=TZV2Z2R5A110B00

## Specifications

Shape	SMD	
Operating Temperature Range	-25°C to 85°C	
Thickness	1.45mm	
Thickness Tolerance	max.	
Rated Voltage	25Vdc	
Cmin.(max.)	0.65pF	
Cmax.	2.5pF	
Cmax. Tolerance	+100/-0%	
Adjustment Direction	Тор	
тс	NP0±300ppm/°C	
Q	200min. at 200MHz, Cmax.	
Withstanding Voltage	55Vdc	
Insulation Resistance(min.)	10000ΜΩ	
Torque	1.0 to 9.8mNm	
Mass	0.04g	

2 of 3

### Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.



Product Search Data Sheet




TZV2Z2R5A110B00

Note: If you have not downloaded this document from our official website, please note that the information provided may not be the most current.

Please download the latest datasheet of TZV2Z2R5A110B00 from the official website of Murata


http://www.murata.com/en-us/products/productdetail?partno=TZV2Z2R5A110B00

Product Data

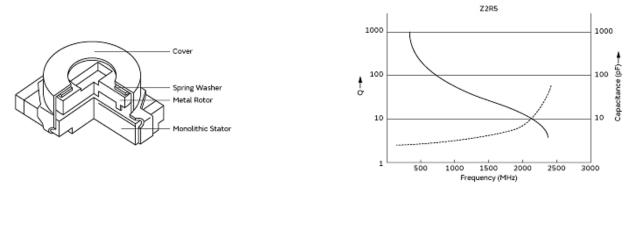

Constructions





Temp. Coeff. Characteristics

3 of 3

### Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

