



# Mounting

## ■ Land Pattern

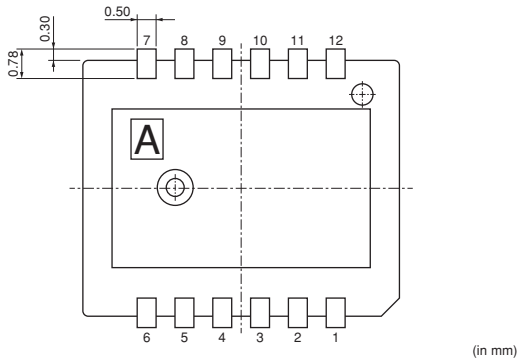

## ■ Reflow Chart

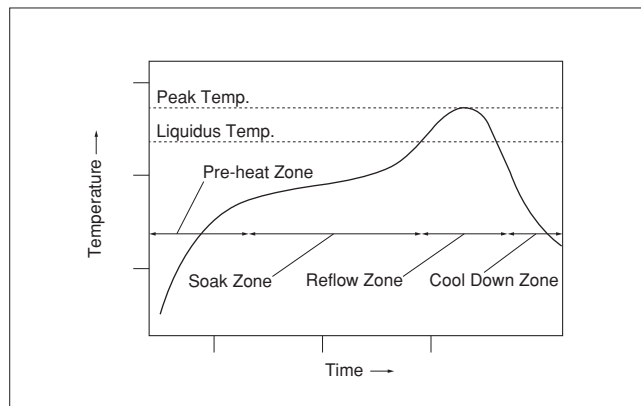

The typical ramp-up rate is 3°C/second max. The reflow max. peak temperature (measured from the component body) should not exceed 260°C. The ramp down rate should be 6°C/second max.