

Product Search Data Sheet

Note: If you have not downloaded this document from our official website, please note that the information provided may not be the most current.

Please download the latest datasheet of LQW18CNR10K00# from the official website of Murata

http://www.murata.com/en/products/productdetail?partno=LQW18CNR10K00%23

"#"at the end indicates the package specification code.

For RF Choke, For Power Choke



LQW18CNR10K00D

< List of part numbers with package codes > LQW18CNR10K00B LQW18CNR10K00D LQW18CNR10K00J




Applications


Unsuitable	Please be sure to read and comply with	
Applications	these "Precautions for use."	
	Consumer equipment,Medical	
	equipment [GHTF A/B/C] except for	
	implant & surgery & auto injector,	
	Industrial equipment except for	
	transportation & facility & energy	
	equipment	
Specific	Please refer to Our Website and	
Applications	specifications, etc. for information about	
	the performance, functions, quality,	
	management, and safety required for	
	the above applications, and use	
	Products after confirming the	
	performance and reliability of the actual	
	Product.	
Recommended	Consumer equipment	
Applications	Consumer equipment	



Appearance & Shape







(in mm)

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.



1 of 4



rch Data Sheet information provided may not be the most current. Please download the latest datasheet of LQW18CNR10K00# from the official website of Murata

http://www.murata.com/en/products/productdetail?partno=LQW18CNR10K00%23

"#"at the end indicates the package specification code.

Note: If you have not downloaded this document from our official website, please note that the



References

LQW18CNR10K00D

Packaging	Specifications	Standard Packing Quantity
В	Bulk(Bag)	500
D	180mm Paper Tape	4000
J	330mm Paper Tape	10000

Mass (typ.)		
1 piece	0.004g	

2 of 4

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.





LQW18CNR10K00D

Note: If you have not downloaded this document from our official website, please note that the information provided may not be the most current.

 $\label{eq:please} Please \ download \ the \ latest \ data sheet \ of \ LQW18CNR10K00\# \ from \ the \ of ficial \ website \ of \ Murata$

http://www.murata.com/en/products/productdetail?partno=LQW18CNR10K00%23

"#"at the end indicates the package specification code.



Specifications

L size	1.6±0.15mm
W size	0.8±0.15mm
T size	0.8±0.15mm
Size code inch (mm)	0603 (1608)
Inductance	100nH±10%
Inductance Test Frequency	10MHz
Rated current (Itemp) (Based on Temperature rise)	1000mA
Max. of DC resistance	0.1Ω
Operating Temperature Range(Self-temperature rise is not included)	-40℃ to 85℃
Class of magnetic shield	Non-Shielded
Self resonance frequency (min.)	1260MHz
Brand	Murata
Series	LQW18CN_00

3 of 4

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.







LQW18CNR10K00D


Characteristic Data

Note: If you have not downloaded this document from our official website, please note that the information provided may not be the most current.


Please download the latest datasheet of LQW18CNR10K00# from the official website of Murata

http://www.murata.com/en/products/productdetail?partno=LQW18CNR10K00%23


"#"at the end indicates the package specification code.

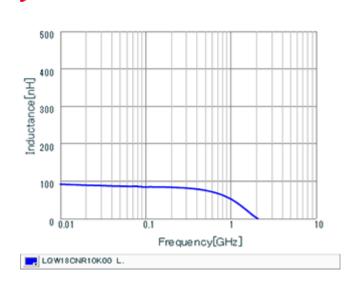


Inductance - Frequency Characteristics



Impedance - Frequency Characteristics



Impedance - Current Characteristics



Q-Frequency Characteristics

4 of 4

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

- without advance notice. Please check with our sales representatives or product engineers before ordering.
- 2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering

